



访问我们的官方网站了解更多内容

扫描二维码关注

26MnB5

Boron alloyed quenched and tempered steel

Material no.	-
according to	DIN EN ISO 683-2
IMDS-Nr.	65405509
Tensile strength class	B

General information

Steel grade 26MnB5 in accordance with DIN EN ISO 683-2 is one of the boron-alloyed quenched and tempered steels. These grades are characterized in particular by their formability in the hot rolled state and their high strength after the heat treatment. The strength characteristics after quenching and tempering are achieved in particular by the low boron content, in addition to the carbon and manganese. SZFG is current delivering manganese-boron steels from 10MnB5 to 40MnB5.

Chemische Zusammensetzung ¹⁾²⁾

(in Gewichtsprozent)

	min. in %	max. in %
C	0.22	0.29
Si	0.15	0.35
Mn	1.15	1.45
P		0.02
S		0.005
Cr	0.05	0.25
Ti	0.010	0.045
B	0.0010	0.0050

1) heat analysis

2) Deviating promises may be possible by arrangement.

Typical mechanical properties³⁾

(Approximate values)

Yield strength $R_{p0.2}$ (thickness $e \leq 6 / e > 6$) in MPa
350 - 580 / 340 - 570

Tensile strength R_m (thickness $e \leq 6 / e > 6$) in MPa
580 - 740 / 500 - 720

Total elongation $A_{80}^{4)}$ in %

≥ 12

Total elongation $A_5^{4)}$ (thickness $e \leq 6 / e > 6$) in %

$\geq 14 / \geq 11$

3) Tested transverse to direction of rolling

4) It applies to nominal thickness e:

$e < 3$ mm: A_{80}

$e \geq 3$ mm: A_5

Delivery form

The steel is supplied as hot-rolled strip (pickled, unpickled) as well as longitudinally or transversely cut hot-rolled strip in nominal thicknesses from 2.0 to 12.7 mm in widths in accordance with the SZFG delivery programme (strength class B). Additional thicknesses are also available upon agreement. SZFG uses a Ti-Cr concept. Where necessary, a statement of the required chemical analysis or inclusion of a customer specification is required.

The conditions of DIN EN ISO 683-2, Sections 6.3 and 8 apply to the delivery and inspection. All quenched and tempered steels are delivered in a hot-rolled, untreated state.

Inspection certificates in accordance with DIN EN 10204 can also be delivered in the following forms: computer medium, remote data transmission, fax, E-Mail, paper.

Available dimensions

Hot-rolled coils unpickled, mill edge

Thickness in mm	Width in mm
2.00 - 2.24	900 - 1,400
2.25 - 2.49	900 - 1,450
2.50 - 2.99	900 - 1,500
3.00 - 3.99	900 - 1,680
4.00 - 12.70	900 - 1,750

Widths up to 2,000 mm on request.

Hot-rolled coils pickled, mill edge

Thickness in mm	Width in mm
2.00 - 2.24	900 - 1,400
2.25 - 2.49	900 - 1,450
2.50 - 2.99	900 - 1,500
3.00 - 12.70	900 - 1,530

Hot-rolled slit strip

Thickness in mm	Width in mm
2.00 - 2.24	100 - 690
2.25 - 2.49	100 - 715
2.50 - 2.99	100 - 740
3.00 - 4.60	100 - 800
4.61 - 6.00	116 - 800
6.01 - 7.00	175 - 800
7.01 - 8.00	233 - 800

Widths < 100 mm on request.





访问我们的官方网站了解更多内容

扫描二维码关注

Microstructure

In the hot-rolled state, the 26MnB5 typically exhibits a ferritic-pearlitic microstructure with a typical grain size of > 9 according to ASTM.

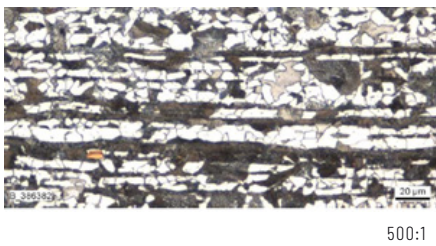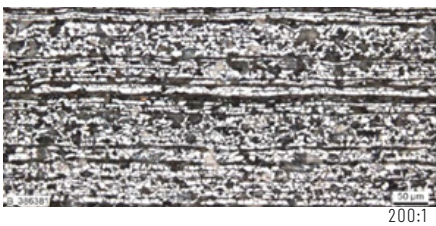


In the hardened and tempered state, after suitable heat treatment the manganese-boron steels form a microstructure consisting of 100% martensite:



Tempered and water cooled

200:1

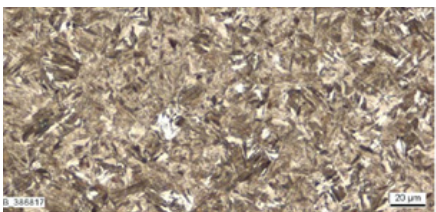

Tempered and oil cooled


500:1

Example applications

Thanks to the combination of ductility and hardness, the 26MnB5 is particularly used for supporting body parts and safety-relevant parts in the automotive industry, such as chassis components, gear shafts or bumpers.




Example:
Stabilizer

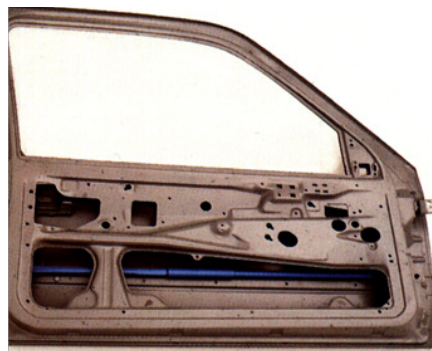

Example:
Side impact protection

Press-hardening

Press-hardening helps combine the hot forming and hardening procedures in one process step. In press-hardening, the steel's microstructure is first transferred into the austenitic range and formed by heating at more than 950°C in a protective atmosphere. While still in the mold, the pressed part is cooled to temperatures between 100°C and 200°C . This leads to the formation of a martensitic microstructure, which results in a high strength component.

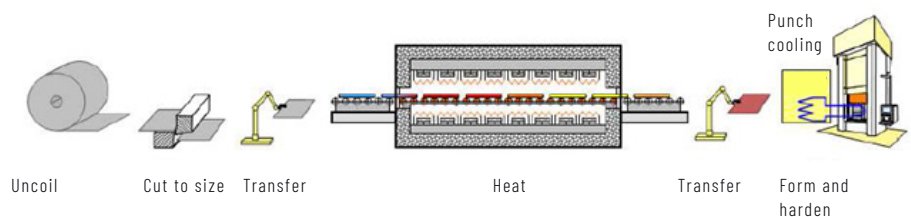



访问我们的官方网站了解更多内容


扫描二维码关注

Welding

The manganese-boron steels are suitable for welding with all known welding procedures, either by hand or with automatic systems. Resistance spot welding, gas-shielded welding and laser beam welding are particularly applicable. The steels are also suitable for welding in mixed joints with other common steel grades and in different thicknesses. The quality of the welded joint, however, depends on the welding procedure, the welding conditions and the selection of the correct filler materials.

In addition, it must be noted that when welding these steels in the quenched and tempered state, tempering effects can occur in the joining zone. This can reduce the strength of the joint compared to the base material that was strongly solidified by the preceding hot-forming process.

Characteristics in the hardened state

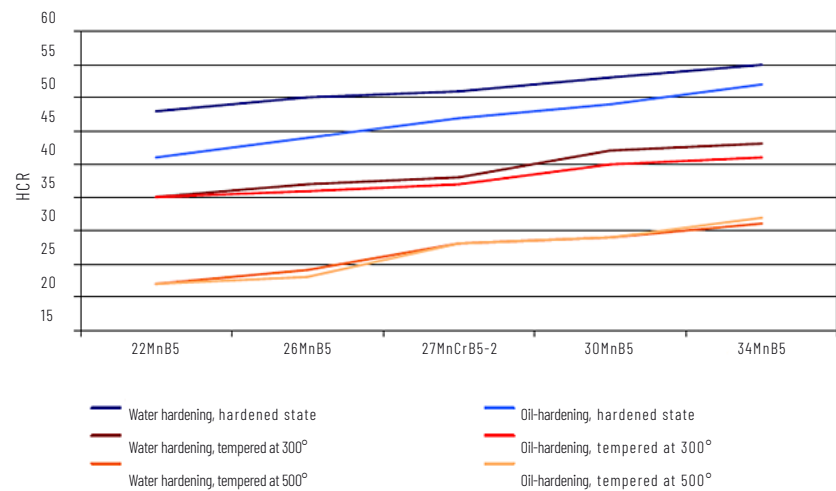

微信公众号

常州钢管博客
www.josen.net

仁成金属
Rensheng Metal

常州仁成金属制品有限公司
15年专注 **无缝钢管定制生产**

用心打造每一根钢管，做无缝钢管定制技术的赢领者
研发技术团队11人，为您的个性化需求提供整体解决方案



常州精密钢管博客网

官网: www.rcmetal.cn
官博: www.josen.net